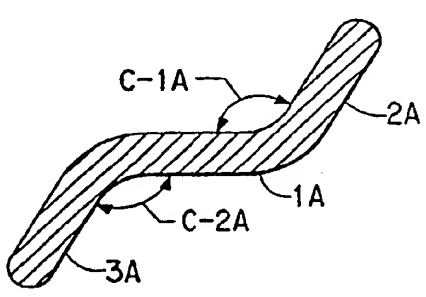


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D01D 5/253		A1	(11) International Publication Number: WO 95/01469
			(43) International Publication Date: 12 January 1995 (12.01.95)
(21) International Application Number: PCT/US94/06437			(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 15 June 1994 (15.06.94)			
(30) Priority Data: 08/085,694 30 June 1993 (30.06.93) US			
(71) Applicant: E.I. DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).			
(72) Inventors: MILLS, Maya, Dafauti; Route 5, Box 22A, River Road, Seaford, DE 19973-9805 (US). TUNG, Wae-Hai; 101 Surrey Drive, Seaford, DE 19973 (US).			
(74) Agents: SULLIVAN, Daniel, W. et al.; E.I. du Pont de Nemours and Company, Legal/Patent Records Center, 1007 Market Street, Wilmington, DE 19898 (US).			Published <i>With international search report.</i>
(54) Title: FIBER BILOBAL CROSS SECTIONS AND CARPETS PREPARED THEREFROM HAVING A SILK-LIKE LUSTER AND SOFT HAND			
			
(57) Abstract			
<p>The present invention relates to synthetic filaments having a distinctive bilobal cross-sectional shape. The cross section includes a rectangular-shaped segment, wherein lobes having a curved tip portion extend from each end of the segment. The filaments are especially suitable for making carpets which exhibit a silk-like luster and have a soft hand.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

TITLE

FIBER BILOBAL CROSS-SECTIONS AND CARPETS
PREPARED THEREFROM HAVING A SILK-LIKE LUSTER AND SOFT HAND

5

BACKGROUND OF THE INVENTIONField of the Invention

The present invention relates to synthetic
filaments having a distinctive bilobal cross-sectional
10 shape. The filaments are especially suitable for making
carpets which exhibit a silk-like luster and have a soft
hand.

Description of Related Art

15 The majority of carpets used in residences are
referred to as cut-pile carpets. In such carpets, heat-
set, ply-twisted, pile yarn is inserted into a backing
material as loops which are then cut to form vertical
tufts. The tufts are then evenly sheared to a desired
20 height which is typically about 0.4 to 0.7 inches.

Today, there are numerous cut-pile carpet styles
available, depending upon where the carpet is to be
installed. For instance, in areas where there is a high
level of traffic, such as hallways and stairs, frieze-type
25 carpets are often used. These carpets are made from ply-
twisted pile yarns having a high degree of twist.
Generally, such carpets have a firm, dense "hand" and show
good durability. By the term, "hand", it is meant the
tactile qualities of the carpet such as softness,
30 firmness, elasticity and other qualities perceived by
touch. In living rooms, textured saxony-type carpets
having good durability, as well as a plusher, more
luxurious hand are often used.

For bathrooms, there is a particular need for
35 carpets which have a soft and comfortable texture. As
used herein, the term "carpet" includes floor coverings
having pile yarns and a backing system as well as rugs
which may or may not have a secondary backing. It is also
important that such carpets have good "washfastness" since

they are subject to frequent washing and drying. By the term "washfastness" as used herein, it is meant the resistance of the dyed carpet to loss of color during laundering.

5 Those skilled in the art have considered different ways for preparing carpets having a softer, more comfortable hand. For instance, it is known to use multi-filament yarns having a denier per filament (dpf) of about 4.5 dpf in order to obtain such an effect. However, these
10 finer dpf yarns are more difficult to manufacture than coarse dpf yarns, especially in bulked continuous filament (BCF) yarn-making operations. This translates into higher total production costs for the finished carpet. Moreover, finer dpf yarns tend to have poor washfastness and newness
15 retention due to the increased surface area of the filaments.

 In addition, Jamieson, U.S. Patent 3,249,669, describes making fabrics from polyester multifilament yarn bundles, wherein the filaments have different cross-
20 section shapes. Thus, filaments having round cross-sections are combined with filaments having Y-shaped cross-sections. The fabrics are described as having more bulk and a "pleasing hand" versus yarns of homogeneous filament cross-sections.

25 Kimura et al., U.S. Patent 4,416,934 describes a woven or knitted polyester multifilament fabric having a silk-like appearance and touch. The fabric is composed of polyester multifilament yarns each containing filaments of an irregular cross-sectional profile, e.g., trilobal,
30 star-shaped, C-shaped, L-shaped, or V-shaped cross-sections.

 In Bagnall, U.S. Patent 3,508,390, filaments having a Y-shaped cross-section are described. The filaments may be prepared from synthetic polymers, such as
35 polyamides and polyesters, and may be used in floor covering materials. Fabrics prepared from such filaments are described as having excellent dyeability and may have a silk appearance and dry, soft hand depending upon its intended use.

Now, in accordance with the present invention, there are provided filaments having distinctive bilobal cross-sections. Yarn bundles containing said filaments may be used to prepare carpets having good bulk and a soft
5 hand. The carpets also exhibit a silk-like luster with low glitter and good color depth. By the term "luster", it is meant the overall glow of the carpet from reflected light. By the term "glitter", it is meant the specks of light perceived on the carpet when intense light is
10 directed at the carpet. This is due to minute fiber sections acting as mirrors or reflecting prisms. Carpets are often referred to as having a bright or dull luster, but both types of carpets may have a high degree of glitter. "Color depth" refers to the color's degree of
15 intensity. It has further been found that the carpets of this invention also demonstrate good washfastness.

SUMMARY OF THE INVENTION

The present invention relates to new filaments
20 having a distinctive bilobal cross-sectional shape. The filaments are composed of a thermoplastic polymer and are characterized by a cross-section having a substantially flat sided rectangular-shaped central segment. Arms, or lobes, having a curved tip portion extend from each end of
25 the central segment in such a manner that an angle of 105 to 165 degrees is formed between each of the arms and the central segment.

Suitable fiber-forming polymers include polyamides, such as nylon 6,6 and nylon 6, polyesters, and
30 polyolefins. The filaments may be used to make bulked continuous filament yarns and staple fiber which are suitable for carpets. Preferably, the total yarn denier is about 1000 to 1200, and the denier per filament is about 6 to 12. Carpets prepared from such yarns exhibit a
35 silk-like luster and have a soft, comfortable hand.

The invention also includes spinnerets for making such filaments. The spinnerets include a plate having upper and lower surfaces connected by a segmented capillary. The segmented capillary includes a central

rectangular-shaped slot and two radial slots. Each radial slot is connected to an opposite end of the central slot at an angle of 105 to 165 degrees.

5 BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 is a face view of a trilobal spinneret capillary of the prior art.

FIG. 1A is a cross-sectional view of a filament spun through capillaries of the type shown in FIG. 1.

10 FIG. 2 is a face view of a ribbon spinneret capillary of the prior art.

FIG. 2A is a cross-sectional view of a filament spun through capillaries of the type shown in FIG. 2.

15 FIG. 3 is a face view of a spinneret capillary of the present invention, comprising three connecting rectangular-shaped slots.

FIG. 3A is a cross-sectional view of a filament spun through capillaries of the type shown in FIG. 3.

20 FIG. 4 is a face view of a spinneret capillary of the present invention, comprising three connecting rectangular-shaped slots.

FIG. 4A is a cross-sectional view of a filament spun through capillaries of the type shown in FIG. 4.

25 DETAILED DESCRIPTION OF THE INVENTION

The filaments of this invention are generally prepared by spinning molten polymer or polymer solutions through spinneret capillaries which are designed to provide specific fiber cross-sections.

30 The filaments may be prepared from synthetic, thermoplastic polymers which are melt-spinnable. These polymers include, for example, polyolefins such as polypropylene, polyamides such as polyhexamethylene adipamide (nylon 6,6) and polycaprolactam (nylon 6), and
35 polyesters such as polyethylene terephthalate. Copolymers, terpolymers, and melt blends of such polymers are also suitable. For instance, copolyamides containing at least 80% by weight of hexamethylenedipamide units and one or more different amide units made from amide-forming

moieties such as 2-methyl-pentamethylenediamine (MPMD), caprolactam, dodecanedioic acid, isophthalic acid, etc. may be used. Polymers which form solutions, such as polyacrylonitrile, may also be used. These polymer solutions are dry-spun into filaments.

Generally, in a nylon filament-forming process, the molten polymer is extruded through a spinneret into a quenching medium, where the polymer cools and solidifies to form filaments. Typically, the molten polymer is extruded into a quench chimney where chilled air is blown against the newly formed hot filaments. The filaments are pulled through the quench zone by means of a feed roll and treated with a spin-draw finish from a finish applicator. The filaments are then passed over heated draw rolls. Subsequently, the filaments may be crimped and cut into short lengths to make staple fiber, or bulked to make bulked continuous filaments (BCF). Crimping of the yarn may be conducted by such techniques as gear-crimping or stuffer-box crimping. Hot air jet-bulking methods, as described in Breen and Lauterbach, U.S. Patent 3,186,155, may be employed to bulk the yarn.

It is recognized that the specific spinning conditions, e.g., viscosity, rate of extrusion, quenching, etc. will vary depending upon the polymer used. The polymer spinning dopes may also contain conventional additives, such as delustrants, antioxidants, dyes, pigments, antistatic agents, ultraviolet stabilizers, etc.

The resulting singles yarn may be ply-twisted together on a cable twister. The ply-twisted yarn is then subjected to a heat-setting operation to set the twist and bulk in the yarn. Such operations include a Superba® method using saturated steam, or a Suessen method using dry heat. The yarns may then be tufted into carpet backings by techniques known in the trade and the carpet is subjected to dyeing and other finishing steps including stain-resist and fluorochemical treatment.

Referring to FIG. 3, an example of a suitable spinneret capillary for forming filaments of this invention is illustrated.

The capillary includes a central rectangular-shaped slot (1) which is connected at each end to radial slots (2) and (3). The angles formed between the central slot and the connecting radial slots (C-1) and (C-2) are
5 in the range of about 105 to 165 degrees. The slots typically have a length (A) of about 0.005 to 0.050 inches, and a width (B) of about 0.001 to 0.015 inches.

The dimensions for each slot are further defined by the following ratio:

10

$$1.5 < A1/B1 < 10$$

where,

15 A1 = length of a slot
 B1 = width of the slot.

Generally, the spinneret capillary should have the foregoing dimensions in order that filaments of this invention may be prepared. However, it is understood that
20 specific dimensions and ratios, within the above ranges, may vary depending upon such factors as polymer type, viscosity, and quench medium. High viscosity polymers and water quench spinning require lower slot length to width ratios, than low viscosity polymers and air quench
25 spinning. It is also recognized that the shape of the slots may be modified, e.g., as shown in FIG. 3, where the tip portion of the radial slots is slightly curved. Preferably, each of the radial slots is substantially the same size and shape.

30 The extruded stream of polymer flows through the specifically designed capillary to produce a corresponding filament, as shown, for example in FIG. 3A. It is important that the polymer stream remains intact as a single homogeneous stream and does not separate into
35 multiple streams as it passes through the slots of the spinneret capillary. This provides for filaments having the desired cross-section, as well as good bulk.

In contrast, techniques for producing ribbon-like filaments, as described in Craig, U.S. Patent 2,959,839

and the aforementioned Jamieson, U.S. Patent 3,249,669 involve feeding multiple streams of polymer through circular orifices in the spinneret capillary. The different polymer streams then fuse together after passing
5 through the capillary. With such methods, it is often difficult to obtain a specific cross-section, because the degree of polymer coalescence is so dependent upon such factors as polymer viscosity, polymer temperature, and spacing of the orifices. Secondly, the streams tend to
10 fuse together so poorly that the resulting filaments tend to separate and fibrillate during texturing or under normal wear conditions, giving the carpets a fuzzy surface.

As shown in FIG. 3A, the resulting filaments of
15 this invention are characterized by a cross-section having a substantially rectangular-shaped central segment (1A). Arms, or lobes, (2A) and (3A) having curved tip portions extend from each end of the central segment in opposite directions. Preferably, the two extending arms are
20 substantially symmetrical.

More particularly, the arms are connected to the central segment in such a manner that an angle of about 105 to 165 degrees is formed between each arm and the central segment (C-1A) and (C-2A). This provides for a
25 distinctive bilobal "S or Z-like" cross-sectional shape in the filament. It is important that the filaments not have a cross-section with a sharp zig-zag configuration. In carpets containing such filaments, there is a tendency for the lobes of adjacent filaments to interlock with each
30 other resulting in a harsher, more rigid hand with less bulk. With the filaments of this invention, the lobes freely intermingle with each other due to their curved nature. Preferably, an angle of greater than 120 degrees is formed between each arm and the central segment. It is
35 also important that the lobes and central portion of the filament cross-section be substantially flat-sided in order for the filament to have good anti-soiling properties. If the filament's periphery has a high amount of indentations and bulges, areas are created where dirt

may become entrapped, and soiling may be more visible in the resulting carpet. In addition, the distance from the central point of the filament to the tip of a lobe (D) should be at least two times (2X) greater than the distance from the central point to the edge of central segment (E). This also ensures that the filament lobes will freely pass over each other, thereby giving the carpet a soft and comfortable hand.

The filaments are generally uniform in cross-section along their length and may be used for several different applications, including carpet, textile, or non-woven uses. For carpet applications, the filaments may be used to manufacture bulked continuous filament (BCF) yarns or staple fiber, as discussed above. The filaments of this invention may be blended with each other or with filaments of other cross-sections. Preferably, the yarn comprises a blend of 40 to 60 percent by weight of filaments having an S-like shaped cross-section and 60 to 40 percent of filaments having a Z-like shaped cross-section. By the term "S-like shaped", it is meant a cross-section as shown in FIG. 4A. By the term "Z-like shaped", it is meant a cross-section as shown in FIG. 3A. Generally, the carpet yarn will have a denier of at least 500, and preferably the denier will be 1000 to 1200. The denier per filament (dpf) is typically 3 to 30, and preferably, the dpf is in the range of 6 to 12. Carpets prepared from such yarns have good bulk and a soft hand. The carpets have a silk-like luster with low glitter and demonstrate good washfastness. The carpets are especially suitable for use as bath rugs.

The present invention is further illustrated by the following examples, but these examples should not be construed as limiting the scope of the invention.

35

TESTING METHODS

Carpet Glitter, Hand, and Bulk Ratings:

The degrees of glitter, bulk, and hand for different cut-pile carpet samples were compared in a side-by-side comparison without knowledge of which carpets were

made with which yarns. The carpets were examined by a panel of people familiar with carpet construction and surface texture. The test carpet samples were given ratings of low, medium and high in the categories of
5 glitter and bulk. For hand, the carpets were rated harsh, medium, or soft.

Washfastness

The carpet samples were washed in a washing
10 machine with hot water and Tide® detergent (0.5 g/liter). The temperature of the wash bath was 100°F and the pH was 9.5. The samples were then dried with hot air. After 20 washing and drying cycles, the tested samples were compared with a control carpet sample which was not
15 subjected to washing. The test and control samples were assessed by a panel of people familiar with carpet dyeing. Carpet samples with no noticeable change in color depth or shade were given a rating of 5. Carpet samples having substantially a complete loss of color were given a rating
20 of 1.

Relative Viscosity

The relative viscosity (RV) of nylon 6,6 was measured by dissolving 5.5 grams of nylon 6,6 polymer in
25 50 cc of formic acid. The RV is the ratio of the absolute viscosity of the nylon 6,6 /formic acid solution to the absolute viscosity of the formic acid. Both absolute viscosities were measured at 25°C.

30 Color Depth

This method is used to determine the color depth, i.e., color intensity, of the sample carpets. The samples were tested using a Hunterlab 025 Color/Difference Meter, available from Hunter Associates Laboratory, Fairfax,
35 Virginia. This instrument measured the "L" (total reflectance) values of the samples. The "L" value is a measure of lightness which varies from 100 for perfectly white regions to 0 for black regions. The samples were placed into the sample cradle and passed across the

viewing port of the colorimeter. The "L" values were registered on the digital readout.

EXAMPLES

5 Examples 1-3

In the following examples, nylon 6,6 filaments having various cross-sections were produced. The nylon 6,6 filaments were spun from different spinnerets. Each spinneret had 160 capillaries of a specific design, as
10 shown in FIGS. 1-4.

The nylon 6,6 polymer used for all of the examples was a bright polymer. The polymer spin dope did not contain any delustrant and had a relative viscosity (RV) of 72 +/- 3 units. The polymer temperature before the
15 spinning pack was controlled at about 288 +/- 1°C., and spinning throughput was 70 pounds per hour. The polymer was extruded through the different spinnerets and divided into two 80 filament segments. The molten fibers were then rapidly quenched in a chimney, where cooling air at 9
20 °C was blown past the filaments at 300 cubic feet per minute (0.236 cubic m/sec). The filaments were pulled by a feed roll rotating at a surface speed of 800 yd./min (732 m/min) through the quench zone and then were coated with a lubricant for drawing and crimping. The coated
25 yarns were drawn at 2197 yds/min (2.75 X draw ratio) using a pair of heated (175°C) draw rolls. The yarns were then forwarded into a dual-impingement bulking jet (225°C hot air), similar to that described in Coon, U.S. Patent 3,525,134 to form two 1200 denier, 15 denier per filament
30 (dpf) yarns.

The spun, drawn, and crimped bulked continuous filament (BCF) yarns were cable twisted to 4.0 X 4.0 turns per inch (tpi) on a cable twister and heat-set on a Superba® heat-setting machine at the standard process
35 conditions for nylon 6,6 BCF yarns. The test yarns were then tufted into 40 oz/yd., 5/8 inch pile height carpets on a 1/8 inch gauge cut-pile tufting machine. The tufted carpets were dyed to a forest green color in a Beck dye for about one hour at a temperature of about 210°F. The

carpet aesthetics were assessed by a panel, as discussed in the foregoing Testing Methods, and the results are reported below in Table I.

Example 1 (Comparative)

5 Multifilament yarns having trilobal filament cross-sections, as shown in FIG. 1A, were made using the above-described process. The filaments were spun through spinneret capillaries, as shown in FIG. 1, having three
10 integrally joined arms (lobes) which were essentially symmetrical. The arms had a width of 0.008 inches and a length of 0.017 inches. The resulting filaments had a modification ratio (MR) of 1.7.

Example 2 (Comparative)

15 Multifilament yarns having flat ribbon filament cross-sections, as shown in FIG. 2A, were made using the above described process. The filaments were spun through spinneret capillaries, as shown in FIG. 2, having a slot
20 length of 0.081 inches and a width of 0.009 inches.

Example 3

Multifilament yarns of this invention having a 50/50 mixture of the filament cross-sections shown in FIG. 3A and 4A were made using the above-described process.
25 The respective filaments were spun through spinneret capillaries, as shown in FIG. 3 and 4. Both capillaries consisted of three equal dimensional slots of 0.027 inches in length and 0.009 inches in width. The angles formed between the slots at C-1 was 120 degrees, while the angle
30 formed at C-2 was 135 degrees.

TABLE I

Example	Cross-section	Hand	Glitter	Bulk	*Color Depth
1 (Comparative)	1.7 MR Trilobal	Harsh	High	High	29.56
2 (Comparative)	Flat Ribbon	Soft	Low	Low	17.62
3	Current Invention	Soft	Low	Medium to High	16.84

*L values - lower values correspond to
a deeper colored appearance

Examples 4 and 5

Nylon 6,6 bulked continuous multifilament yarns were produced using a spinning process similar to the process described in Examples 1 to 3. The yarn in Example 4 was a 1015 denier, 6.3 dpf yarn having a 50/50 blend of the filament cross-sections shown in FIGS. 3A and 4A. The yarn in comparative Example 5 was a 1005 denier, 4.5 dpf yarn having 2.5 MR trilobal filament cross-sections. Both yarn samples were cable twisted at 4x4 tpi, heatset at 270 °F on a Superba® heatset machine, tufted into 46 oz/sq. yd. bath rugs on a 3/16 gauge (2 ends per needle) machine and dyed in a Beck dyer to a cranberry red color for about one hour at a temperature of about 210°F. The test rugs were assessed by a panel for luster and hand, as discussed above. The rugs were also tested for washfastness, as described above. The test results are summarized below in Table II.

TABLE II

<u>Example</u>	<u>Denier/dpf</u>	<u>Cross-section</u>	<u>Hand</u>	<u>Wash Fastness</u>
4	1015/6.3	Current Invention	Soft	5
5 (Comparative)	1005/4.5	2.5 MR Trilobal	Medium	3

CLAIMS:

1. A filament comprising a thermoplastic polymer characterized by a cross-section having a substantially flat sided rectangular-shaped central segment with a
5 substantially flat sided arm having a curved tip portion extending from each end of said segment, wherein said arms extend from said segment in such a manner as to form an angle of 105 to 165 degrees between each said arm and said central segment.
- 10 2. The filament of claim 1, wherein the synthetic polymer is selected from the group consisting of polyamides, polyester, and polyolefins.
3. The filament of claim 2, wherein the polymer is nylon 6,6.
- 15 4. A bulked continuous filament yarn comprising the filament of claim 1.
5. The yarn of claim 4, wherein the yarn has a denier of 1000 to 1200 and a denier per filament of 6 to 12.
- 20 6. The yarn of claim 4, wherein the yarn comprises a blend of 40 to 60 percent by weight of filaments having an S-like shaped cross-section and 60 to 40 percent of filaments having a Z-like shaped cross-section.
- 25 7. A carpet comprising the yarn of claim 4.
8. A staple fiber yarn comprising the filament of claim 1.
9. A carpet comprising the yarn of claim 8.
10. A spinneret, comprising:
30 a) a plate having upper and lower surfaces connected by a segmented capillary, and
b) the segmented capillary comprising a central rectangular-shaped slot and two radial slots, wherein each radial slot is connected to an opposite end of the central
35 slot to form an angle of 105 to 165 degrees between the radial slot and central slot.

FIG. 1
(PRIOR ART)




FIG. 1A
(PRIOR ART)




FIG. 2
(PRIOR ART)




FIG. 2A
(PRIOR ART)



FIG. 3

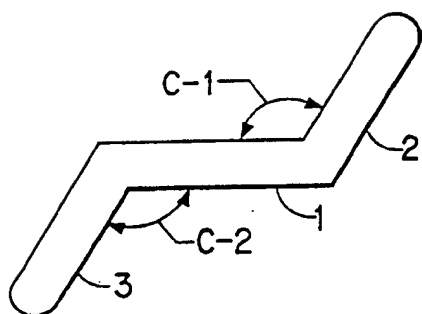


FIG. 3A

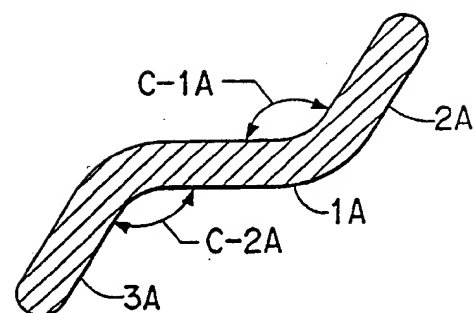


FIG. 4


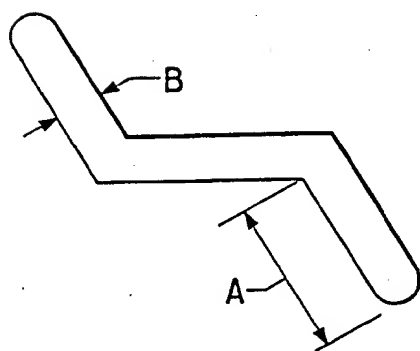


FIG. 4A

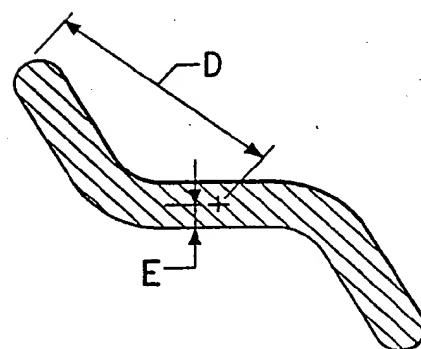

INTERNATIONAL SEARCH REPORT

Inter. nal Application No
PCT/US 94/06437A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 D01D5/253

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB,A,1 153 543 (SNAM PROGETTI S.P.A.) 29 May 1969 see the whole document -----	1-5,8,10

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

11 October 1994

Date of mailing of the international search report

28. 10. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Tarrida Torrell, J

information on patent family members

PCT/US 94/06437

Form PCT/ISA/210 (patent family annex) (July 1992)

Mr. J. Edgar Hoover
Federal Bureau of Investigation
Washington, D. C. 20535

Dear Mr. Hoover:

I am writing to you regarding the information that was provided to me by the [redacted] on [redacted] regarding the [redacted] of the [redacted] in [redacted] on [redacted].

I am sure that you will find this information of interest and I am sure that you will find it helpful in your ongoing investigation of the [redacted] in [redacted] on [redacted].

I am sure that you will find this information of interest and I am sure that you will find it helpful in your ongoing investigation of the [redacted] in [redacted] on [redacted].

Sincerely,
[redacted]

Enclosure: [redacted]

1
2
3
4
5
6
7
8
9
10